


LED Square Bulkhead 20W

Sensor option

IP65

LDT /IES files

50,000 hours



Dimensions (mm)

300 x 300 x 90

LED Type

5630 SMD

Lumen

1440 / 1600 / 1760

CCT

3000K / 4000K / 6000K

Beam Angle

180°

Power Consumption

20 Watts

Volt/AC


100-240

Colour

White / Black or Grey

Material

Die Cast Aluminium & Polycarbonate

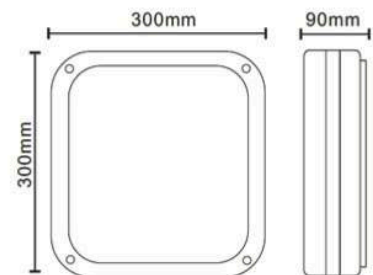


LED Square Bulkhead 30W

Sensor option

IP65

LDT /IES files

50,000 hours

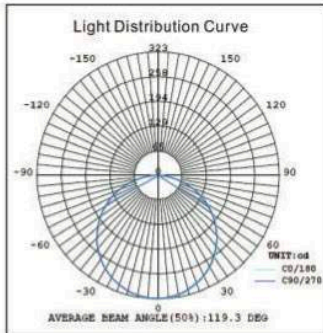

Dimensions (mm)

300 x 300 x 90

LED Type

5630 SMD

Lumen

2160 / 2400 / 2640

CCT

3000K / 4000K / 6000K

Beam Angle

180°

Power Consumption

30 Watts

Volt/AC


100-240

Colour

White / Black or Grey

Material

Die Cast Aluminium & Polycarbonate

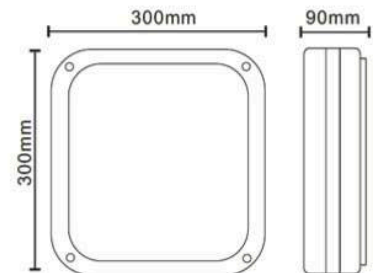


LED Square Bulkhead 40W

Sensor option

IP65

LDT /IES files

50,000 hours



Dimensions (mm)

300 x 300 x 90

LED Type

5630 SMD

Lumen

2880 / 3200 / 3520

CCT

3000K / 4000K / 6000K

Beam Angle

180°

Power Consumption

40 Watts

Volt/AC


100-240

Colour

White / Black or Grey

Material

Die Cast Aluminium & Polycarbonate

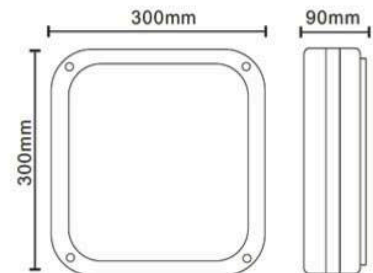


LED Circular Bulkhead 15W

Sensor option

IP65

LDT /IES files

50,000 hours



Dimensions (mm)

275 x 275 x 80

LED Type

5630 SMD

Lumen

1170 / 1200 / 1250

CCT

3000K / 4000K / 6000K

Beam Angle

180°

Power Consumption

15 Watts

Volt/AC


100-240

Colour

White / Black or Grey

Material

Die Cast Aluminium & Polycarbonate




LED Deco Circular Bulkhead 20W

Sensor option

IP65

LDT /IES files

50,000 hours



Dimensions (mm)

275 x 275 x 80

LED Type

5630 SMD

Lumen

1440 / 1600 / 1760

CCT

3000K / 4000K / 6000K

Beam Angle

180°

Power Consumption

20 Watts

Volt/AC

100-240

Colour

White / Black or Grey

Material

Die Cast Aluminium & Polycarbonate




Cross



Lattice



Trident




LED Circular Ring Bulkhead 20W

Sensor option


IP65

LDT /IES files

50,000 hours



Dimensions (mm)	300 x 300 x 85
LED Type	5630 SMD
Lumen	1440 / 1600 / 1760
CCT	3000K / 4000K / 6000K
Beam Angle	180°
Power Consumption	20 Watts
Volt/AC	100-240
Colour	White / Black or Grey
Material	Die Cast Aluminium & Polycarbonate




LED Circular Ring Bulkhead 30W

Sensor option

IP65

LDT /IES files

50,000 hours



Dimensions (mm)

300 x 300 x 85

LED Type

5630 SMD

Lumen

2160 / 2400 / 2640

CCT

3000K / 4000K / 6000K

Beam Angle

180°

Power Consumption

30 Watts

Volt/AC


100-240

Colour

White / Black or Grey

Material

Die Cast Aluminium & Polycarbonate




LED Circular Ring Bulkhead 40W

Sensor option


IP65

LDT /IES files

50,000 hours



Dimensions (mm)	300 x 300 x 85
LED Type	5630 SMD
Lumen	2880 / 3200 / 3520
CCT	3000K / 4000K / 6000K
Beam Angle	180°
Power Consumption	40 Watts
Volt/AC	100-240
Colour	White / Black or Grey
Material	Die Cast Aluminium & Polycarbonate




LED Circular Eyelid Bulkhead 20W

Sensor option


IP65

LDT /IES files

50,000 hours



Dimensions (mm)	275 x 275 x 80
LED Type	5630 SMD
Lumen	1440 / 1600 / 1760
CCT	3000K / 4000K / 6000K
Beam Angle	180°
Power Consumption	20 Watts
Volt/AC	100-240
Colour	White / Black or Grey
Material	Die Cast Aluminium & Polycarbonate




LED Circular Bulkhead 20W

Sensor option

IP65

LDT /IES files

50,000 hours

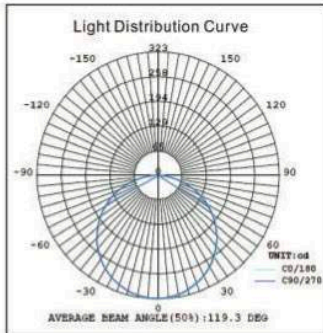

Dimensions (mm)

275 x 275 x 80

LED Type

5630 SMD

Lumen

1440 / 1600 / 1760

CCT

3000K / 4000K / 6000K

Beam Angle

180°

Power Consumption

20 Watts

Volt/AC

100-240

Colour

White / Black or Grey

Material

Die Cast Aluminium & Polycarbonate

